

# RHINO PSV12-50S Power Supply

**READ INSTRUCTIONS BEFORE INSTALLING OR OPERATING THIS DEVICE.  
KEEP FOR FUTURE REFERENCE.**

## 1. Safety instructions

- Switch main power off before connecting or disconnecting the device. Risk of explosion!
- To guarantee sufficient convection cooling, please keep a distance of >40mm above and >20mm below the device as well as a lateral distance of >15mm to other cold source. In case the adjacent device is a heat source, the lateral distance will be >25mm.
- Note that the enclosure of the device can become very hot depending on the ambient temperature and load of the power supply. Risk of burns!
- The main power must be turned off before connecting or disconnecting wires to the terminals!
- Do not introduce any objects into the unit!
- Dangerous voltage present for at least 5 minutes after disconnecting all sources of power.
- The power supplies are built-in units and must be installed in a cabinet or room (condensation free environment and indoor location) that is relatively free of conductive contaminants.
- The unit must be installed in an IP54 enclosure or cabinet in the final installation.

## 2. Device description (Fig. 1)

- (1) Input terminal block connector
- (2) Output terminal block connector
- (3) DC voltage adjustment potentiometer
- (4) DC OK LED (green)
- (5) Universal mounting rail system

## 3. Mounting (Fig. 2)

The power supply unit can be mounted on 35mm DIN rails in accordance with EN60715. The device should be installed with input terminal block on the bottom.

Each device is delivered ready to install.

Snap on the DIN rail as shown in Fig. 2:

1. Tilt the unit slightly upwards and put it onto the DIN rail.
2. Push downwards until stopped.
3. Press against the bottom front side for locking.
4. Shake the unit slightly to ensure that it is secured.

## 4. Dismounting (Fig. 3)

To uninstall, use a flat screwdriver to pull or slide down the latch as shown in Fig. 3. Then slide the PSU in the opposite direction, release the latch and pull out the PSU from the rail.

## 5. Connection

The terminal block connectors allow easy and fast wiring.

You can use flexible (stranded wire) or solid cables with cross sections:

	Electrical Connections and Wire Size			
	Stranded / Solid		Torque	
	mm <sup>2</sup>	AWG	N-m	lb-in
Input	0.52-3.3	20-12	0.51	4.5
Output	0.52-3.3	20-12	0.51	4.5

To secure reliable and shock proof connections, the stripping length should be 4-5mm (see Fig. 4 (1)). Please ensure that wires are fully inserted into the connecting terminals as shown in Fig. 4 (2).

In accordance to EN60950 / UL60950 and EN62368 / UL62368, flexible cables require ferrules.

Use appropriate copper cables that are designed to sustain operating temperature of at least 60°C/75°C for USA or at least 90°C for Canada.

### 5.1. Input connection (Fig. 1, Fig. 5)

Use L, N and GND connections of input terminal connector (see Fig. 1 (1)) to establish the 100-240 VAC connection. Typical connection methods are shown in Figure 5.

The unit is protected with an internal fuse (not replaceable) at L pin and it has been tested and approved on 20A (UL) and 16A (IEC) branch circuits without additional protection device. An external protection device is only required if the supplying branch has an ampacity greater than above. Thus, if an external protective device is necessary, or utilized, a minimum value of 20A B- or 13A C- characteristic breaker should be used.



The internal fuse must not be replaced by the user.

### 5.2. Output connection (Fig. 1 (2))

Use the "+" and "-" screw connections to establish the 12 VDC connection. The output provides 12 VDC. The output voltage can be adjusted from 12 to 15 VDC on the potentiometer. The green LED DC OK displays correct function of the output (Fig. 1 (4)). The device has a short circuit and overload protection and an overvoltage protection limited to 16-18.7 VDC.

### 5.3. Output characteristic curve

The device functions normal under operating line and load conditions. In the event of a short circuit or overload the output voltage and current collapses ( $I_o = 110-150\%$ ). The secondary voltage is reduced and bounces until short circuit or overload on the secondary side has been removed.

### 5.4. Thermal behavior (Fig. 6)

In the case of ambient temperatures:

1. At -10°C to -20°C [14°F to -4°F], the output capacity has to be reduced by 2% per degree Celsius increase in temperature.
2. Above +55°C [131°F], the output capacity has to be reduced by 3.33% per degree Celsius increase in temperature.

If the output capacity is not reduced when  $T_{Amb} > 55°C [131°F]$ , the device will engage thermal protection by switching off, i.e., the output voltage will go into latch-off mode until the component temperature cools down and the AC power is recycled.

FOR TECHNICAL ASSISTANCE CALL 770-844-4200

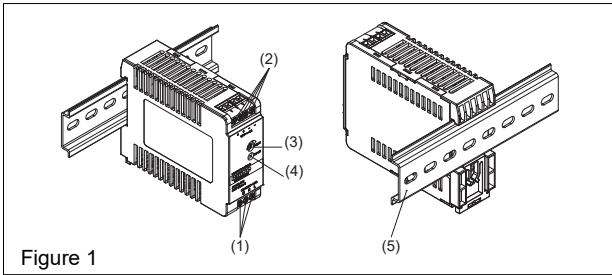


Figure 1

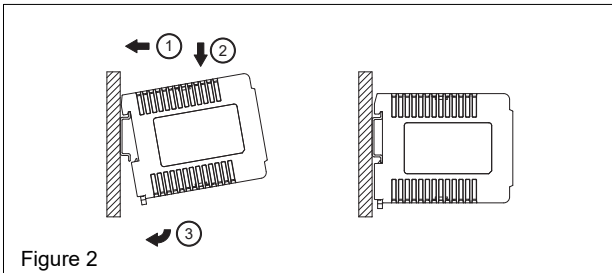


Figure 2

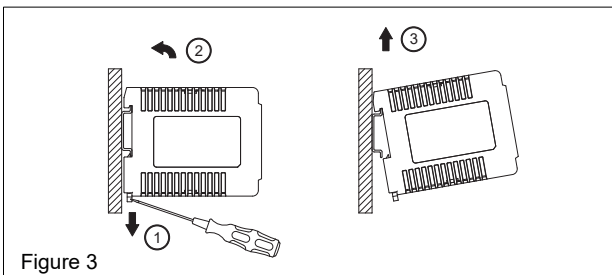


Figure 3

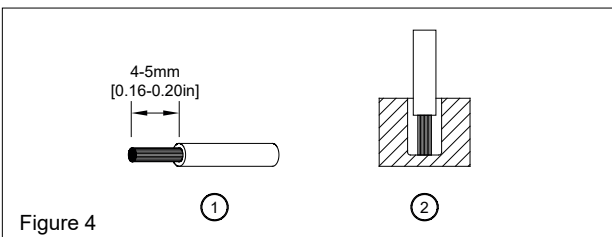


Figure 4

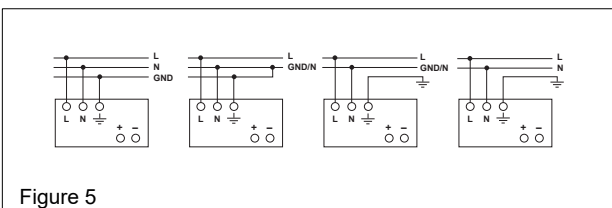


Figure 5

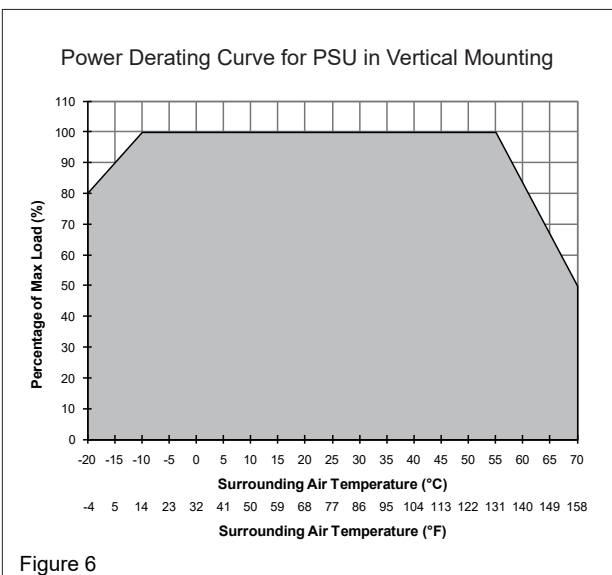




Figure 6

# RHINO PSV12-50S Power Supply

Technical Specifications	
<b>Input (AC)</b>	
Nominal input voltage / frequency	100-240 VAC / 50-60 Hz
Voltage range	85-264 VAC
Frequency	47-63 Hz
Nominal current	< 1.0 A @ 115VAC, < 0.6 A @ 230VAC
Inrush current limitation (+25°C, cold start)	< 35A @ 115VAC, < 60A @ 230VAC
Mains buffering at nominal load (typ.)	20ms typ. @ 115VAC (100% load) 90ms typ. @ 230VAC (100% load)
Turn-on time	< 3s @ 115VAC, < 1.5 s @ 230VAC (100% load)
Internal fuse	T 3.15 A / 250V (non-replaceable)
Recommended backup protection	20A B- or 13A C- characteristic circuit breaker
Leakage current	< 1mA @ 240VAC
<b>Output (DC)</b>	
Nominal output voltage $U_N$ / tolerance	12VDC $\pm$ 2 %
Voltage adjustment range	12-15 VDC (maximum power $\leq$ 48W)
Nominal current	4A
Derating	Refer to Fig. 6 -10°C to -20°C (2%/°C), > 55°C (3.33%/°C) in vertical orientation
Startup with capacitive loads	Max. 3,000 $\mu$ F
Max. power dissipation idling / nominal load approx.	0.5 W / 7 W
Efficiency at 100% load	86.0% typ. @ 115VAC, 88.0% typ. @ 230VAC
PAR (20MHz) at 100% load	< 75 mVpp
Parallel operation	PSB60-REM20S / PSB60-REM40S or with ORing Diode
<b>General Data</b>	
Type of housing	Plastic (PC), enclosed
LED signals	Green LED DC OK
MTBF	> 350,000 hrs. as per Telcordia
Dimensions (L x W x H)	75mm x 30mm x 89.5 mm [2.95 in x 1.18 in x 3.52 in] (See <a href="http://www.AutomationDirect.com">www.AutomationDirect.com</a> for complete engineering drawings.)
Weight	0.18 kg [6.3 oz]
Connection method	Screw connection
Stripping length	4-5mm [0.16-0.20 in]
Operating temperature (surrounding air temperature)	-20°C to +70°C [-4°F to +158°F] (Refer to Fig. 6)
Storage temperature	-40°C to +85°C [-40°F to +185°F]
Humidity at +25°C, no condensation	5 to 95% RH
Vibration	Operating: IEC60068-2-6, Sine Wave: 10Hz to 500Hz @ 19.6m/s <sup>2</sup> ; displacement of 0.35 mm, 60min per axis for all X, Y, Z directions Non-Operating: IEC60068-2-6, Random: 5Hz to 500Hz (2.09 Grms); 20 min. per axis for all X, Y, Z directions
Shock	Operating: IEC60068-2-27, Half Sine Wave: 10G for a duration of 11ms, shock for 1 direction (X axis) Non-Operating: IEC60068-2-27, Half Sine Wave: 50G for a duration of 11ms, 3 shocks for each 3 directions
Pollution degree	2
Altitude (operating)	2000m
<b>Certification and Standards</b>	
Safety entry low voltage	SELV (EN60950)
Electrical safety (of information technology equipment)	UL/C-UL recognized to UL60950-1 and CSA C22.2 No. 60950-1 (File No. E198298), CB scheme to IEC60950-1, UL/C-UL recognized to UL62368-1 and CSA C22.2 No. 62368-1 (File No. E508040), CB scheme to IEC62368-1, Limited Power Source (LPS)
Industrial control equipment	UL/C-UL listed to UL508 and CSA C22.2 No.107.1-01 (File No. E197592)
Class 2 power supply	UL/C-UL listed to UL508 and CSA C22.2 No.107.1-01 (File No. E197592)
CE	In conformance with EMC directive 2014/30/EU and Low Voltage Directive 2014/35/EU
Component power supply for general use	EN61204-3
Immunity	EN55024, EN61000-6-1, EN61000-6-2 (EN61000-4-2, 3, 4, 5, 6, 8, 11)
Emission	EN55032, EN55011, EN61000-3-3, EN61000-6-3, EN61000-6-4
  	
RoHS Compliant	Yes
<b>Safety and Protection</b>	
Surge voltage protection against internal surge voltages	No
Isolation voltage:	
Input / output	3kVAC
Input / PE	3kVAC
Output / PE	0.5 kVAC
Protection degree	IP20
Safety class	Class I with PE connection